
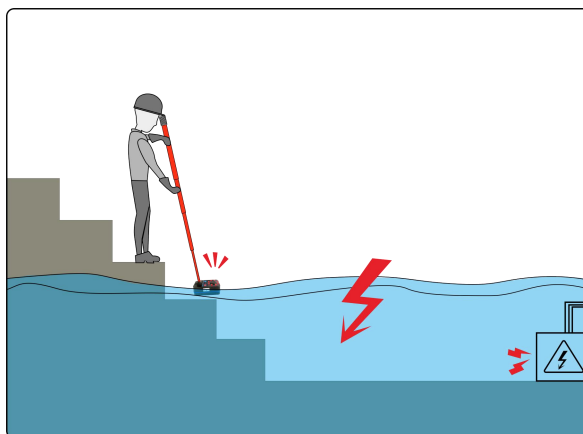
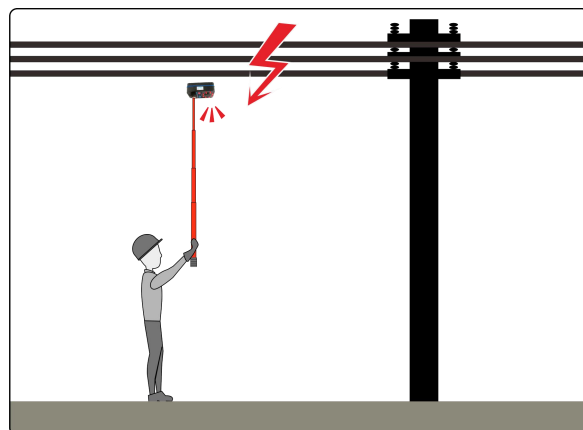


IP67

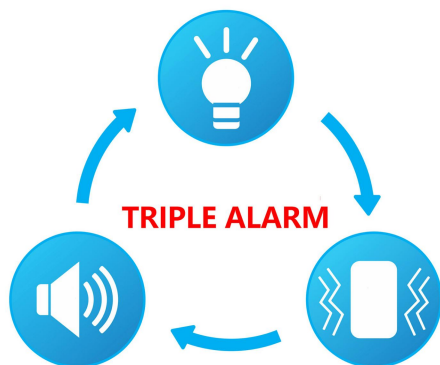

Product Function

When approaching the live object, the alarm will be triggered at a safe distance to remind the operators to pay attention on safety, avoid electric shock accidents, which provide safer guarantee for the workers working near the electricity.

Product Features

1. Non-contact sensing technology, all-round detect electric field, and automatic trigger alarm function.
2. Protection grade IP67, can be used for electric testing in the water.
3. With triple alarm modes of vibration, light and buzzer.
4. With 2 gears selection of high or low voltage alarm.
5. It can be connected to use with insulation rods.
- 6 The alarm power consumption is very small, and the standby time is as long as 6 months.

Technical Specifications

Power Supply	Rechargeable lithium battery DC 7.4V 600mAh
Alarm Voltage Range	Low voltage: 40V~1kV; High voltage: 1kV~500kV
Working Frequency	50Hz/60Hz
Electricity Testing Mode	Non-contact type
Working Time	Continue working(alarm state): around 8 hours Standby: 6months
Alarm Mode	Vibration, light and buzzer
Weight	Alarm: 170g(include battery); Total weight: 820g(include accessories)
Dimension	LXWXH: 111mmX60mmX50mm
Insulation Rod	Stretch state 1m
Protection Level	IP67
Working Temperature & Humidity	-10°C~40°C; below 80%RH
Accessories	Alarm detector: 1PCS; Insulation Rod: 1PCS; Charger Adaptor: 1PCS; Tool Bag: 1PCS